


Frequency Response

— SPL@ (-10dBu ; 1m)
— SPL with -10dB Roll Off
— Acoustic Power


Resolution: 1/48 Octave
Smoothing: 1/6 Octave

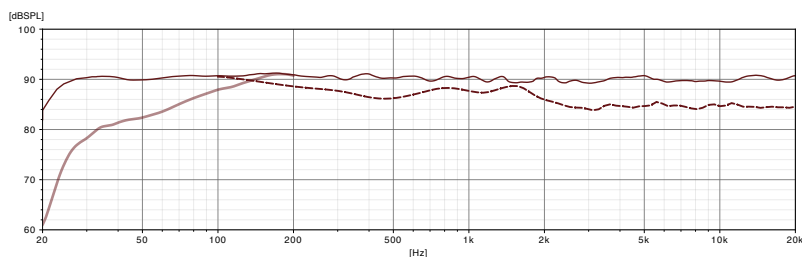

Total Harmonic Distortion

— THD@ (-10dBu ; 1m)


Resolution: 1/48 Octave
Smoothing: 1/6 Octave

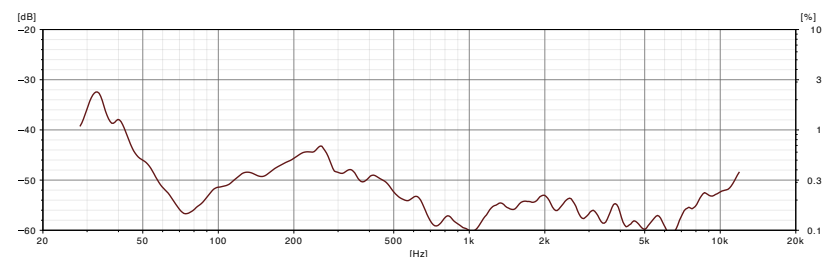

Acoustic Phase


— Acoustic Phase

Delay: 0.803 [ms]
Resolution: 1/48 Octave
Smoothing: 1/6 Octave

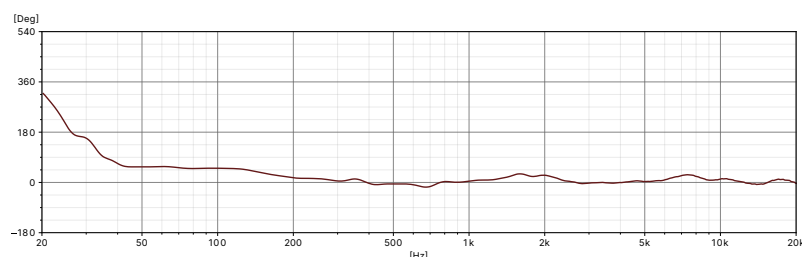


Max Continuous SPL

— Max Continuous SPL @ 1m

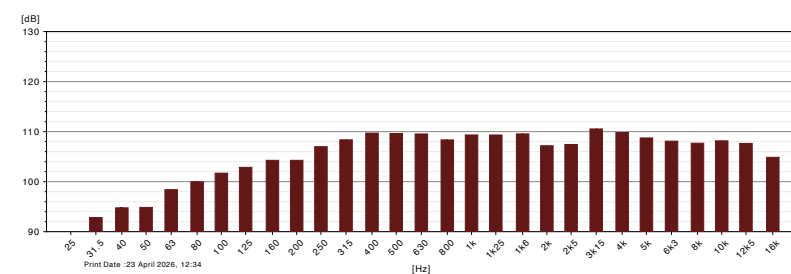



Directivity Index

— Directivity Index

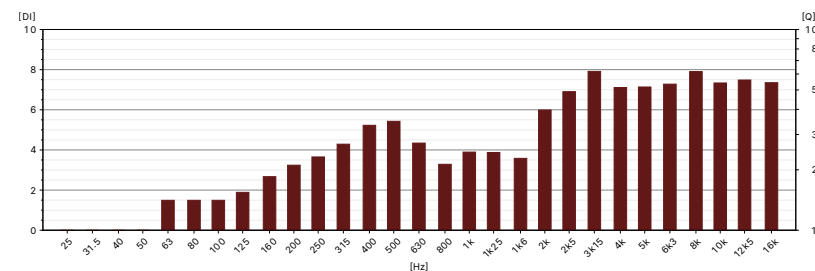

Horizontal Directivity

Frequency resolution: 1/36 Octave
Smoothing: 1/3 Octave

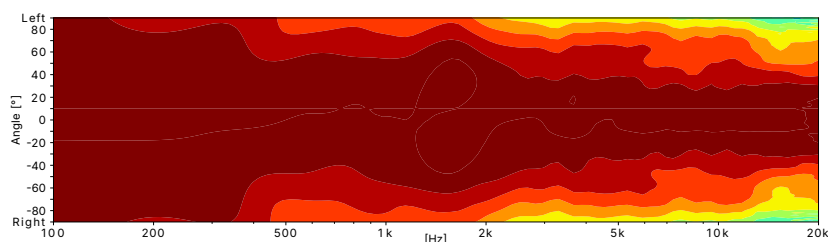

Vertical Directivity

Frequency resolution: 1/36 Octave
Smoothing: 1/3 Octave

